


COATWELL Automatic Emulsion Coating Machine

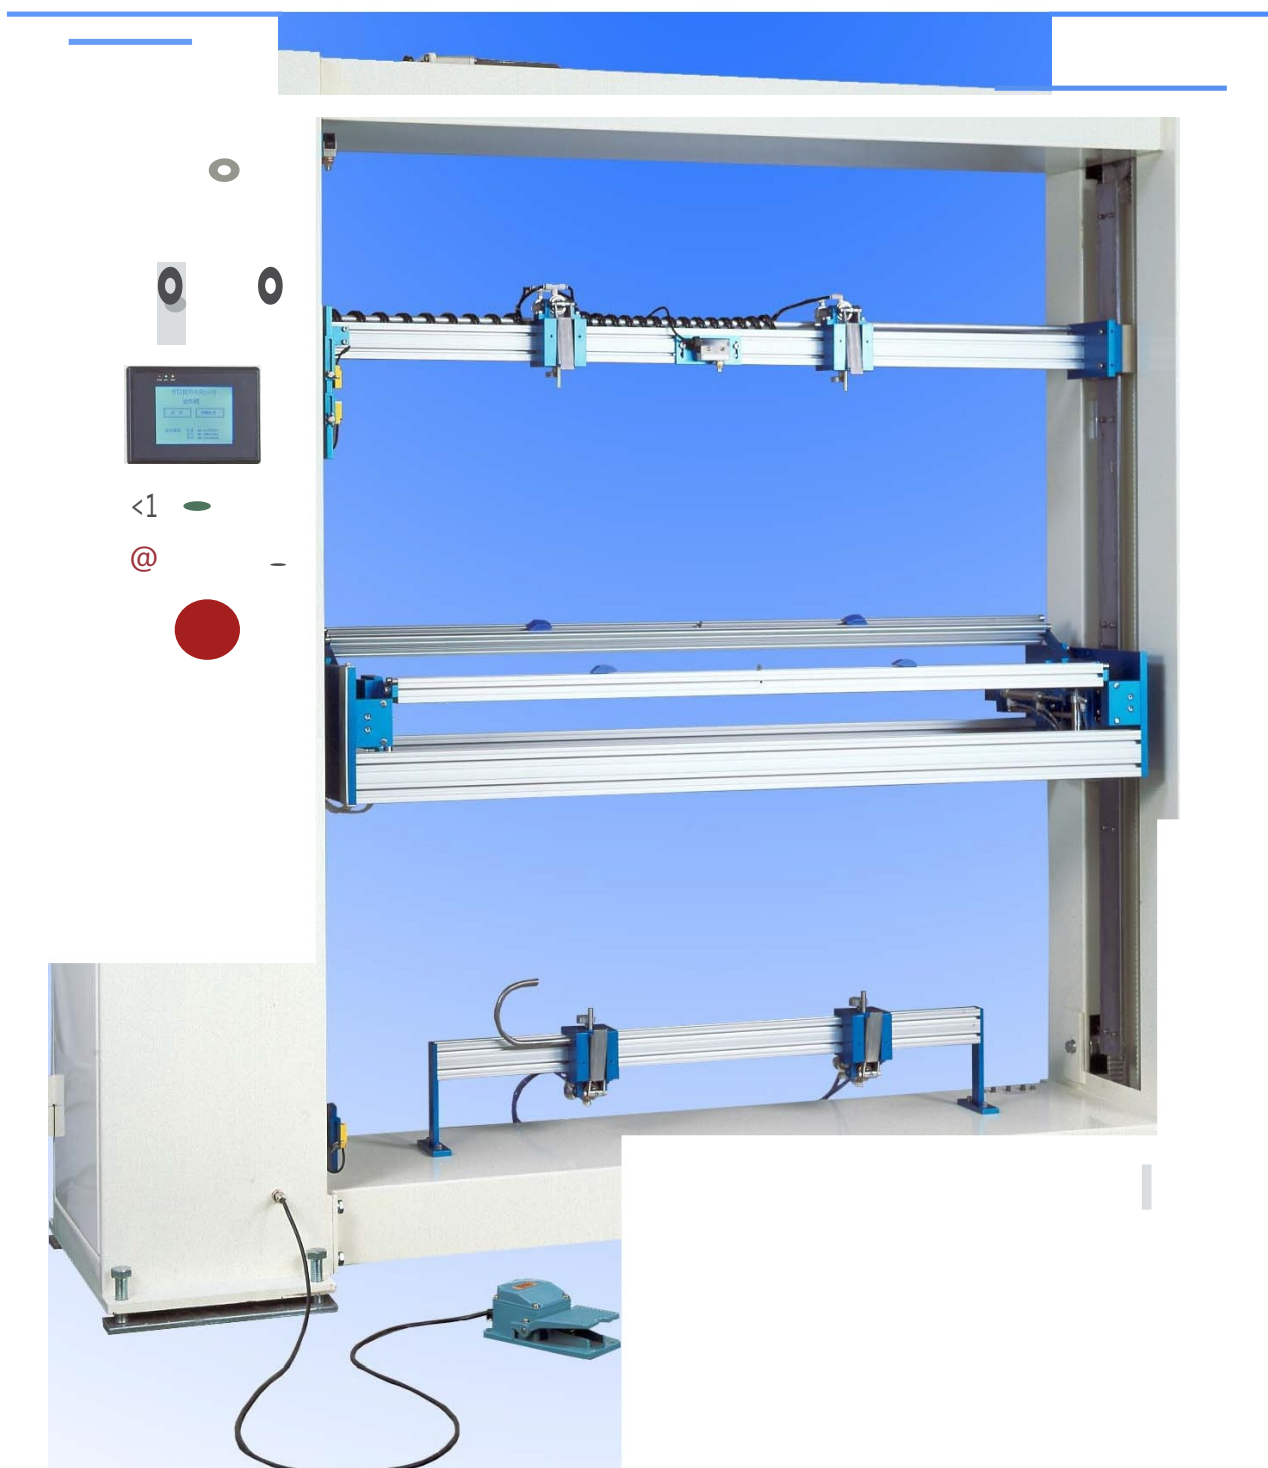

trustwell

trustwell neotechnology co., ltd
4th Fl., No.67, Chang An E. RD., SEC. 2, TAIPEI, TAIWAN,
TEL. +886-(0)2-2518-2297 FAX. +886-(0)2-2518-2296
<http://www.trustwell.com.tw>; E-Mail: trustwell@trustwell.com.tw

COATWELL Automatic Emulsion Coating Machine

Technical Features:

1. Programmable logic control interface
2. High precision pneumatic regulator (By min. 0.01 kg/cm² setting adjustment) for coating pressure control.
3. Excellent reproduction accuracy of coating results guaranteed for direct coating process wet-on-wet of tolerance +/- 1um
4. Exclusively featured ultra low-pressure coating ability. Even with 1 kg/cm² coating pressure, this machine can still achieve excellent coating result while others need to run with at least 2.5 kg/cm² to get a stable coating result.
5. Excellent Wet-on-Dry coating performance.
6. Easy adjustment to various screen frame sizes
7. Fully automatic operation with up to 20 pre-set modes and digitized display
8. Front side Coating troughs allows operations from both the squeegee and printing side.

COATWELL T-23 Specifications:

| | | |
|-------------------|-------------------|-----------------------------------|
| Screen Frame Size | Max. Frame Size : | 1200mm X 1300mm。 |
| | Frame Thickness: | 20mm-40mm。 |
| Dimension | | 1950mm(W) X 1950mm(H) X 580mm(D)。 |
| Air Supply: | Pressure | 6 kg/ cm ² 。 |
| | Consumption | 5 L/min。 |
| Utility: | Voltage | 220V, 1 or 3 Ph, 50/60Hz。 |
| | Current | 10A。 |
| Standard Option: | Coating Trough | 60cm x 1 set。 |

*We reserve the right of specification change.

trustwell
neotechnology

trustwell neotechnology co., ltd.

4th Fl., No.67, Chang An E. RD., SEC. 2, TAIPEI, TAIWAN,
TEL. +886-(0)2-2518-2297 FAX. +886-(0)2-2518-2296

[Http://www.trustwell.com.tw](http://www.trustwell.com.tw) E-Mail: trustwell@trustwell.com.tw,